


产品尺寸图 (Product Size)

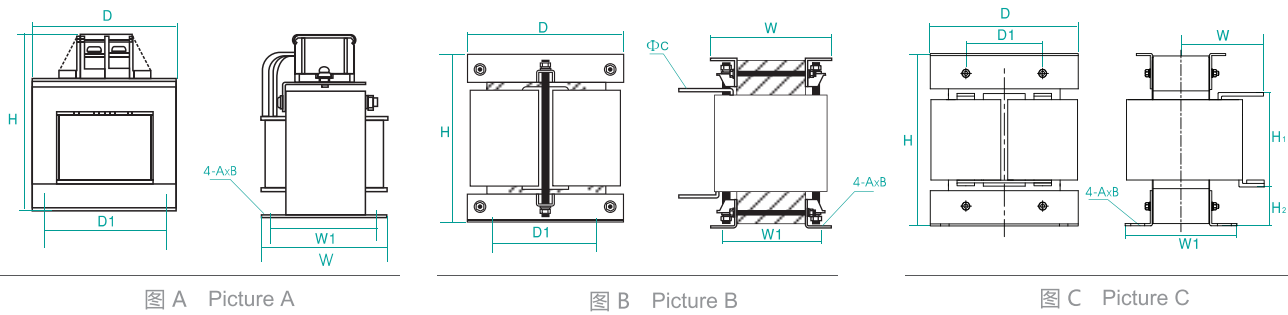

380V输入直流电抗器选型表 380V Input DC Reactor Selection Table

| 电抗器型号<br>Reactor Type | 图号<br>Picture NO. | 功率<br>Power | 额定电流<br>Rated Current(A) | 绝缘等级<br>Insulation Class | 重量(kg)<br>Weight(kg) | 尺寸 Dimension(±5mm) |     |     |     |     |        |
|-----------------------|-------------------|-------------|--------------------------|--------------------------|----------------------|--------------------|-----|-----|-----|-----|--------|
|                       |                   |             |                          |                          |                      | D                  | D1  | W   | W1  | H   | A*B    |
| DCL-0003-EIDC-E28M    | 图 A<br>Picture A  | 0.4         | 3A                       | B                        | 1.5                  | 80                 | 63  | 65  | 47  | 110 | 5.4*9  |
| DCL-0003-EIDC-E28M    |                   | 0.75        | 3A                       | B                        | 1.5                  | 80                 | 63  | 65  | 47  | 110 | 5.4*9  |
| DCL-0006-EIDC-E11M    |                   | 1.5         | 6A                       | B                        | 2.3                  | 80                 | 63  | 85  | 60  | 110 | 5.4*9  |
| DCL-0006-EIDC-E11M    |                   | 2.2         | 6A                       | B                        | 2.3                  | 80                 | 63  | 85  | 60  | 110 | 5.4*9  |
| DCL-0012-EIDC-E6M3    |                   | 3.7         | 12A                      | B                        | 3.2                  | 100                | 80  | 100 | 70  | 125 | 6*11   |
| DCL-0012-EIDC-E6M3    |                   | 4.0         | 12A                      | B                        | 3.2                  | 100                | 80  | 100 | 70  | 125 | 6*11   |
| DCL-0023-EIDH-E3M6    |                   | 5.5         | 23A                      | H                        | 3.8                  | 110                | 87  | 120 | 70  | 135 | 6*11   |
| DCL-0023-EIDH-E3M6    |                   | 7.5         | 23A                      | H                        | 3.8                  | 110                | 87  | 120 | 70  | 135 | 6*11   |
| DCL-0033-EIDH-E2M0    |                   | 11          | 33A                      | H                        | 4.3                  | 110                | 87  | 120 | 70  | 135 | 6*11   |
| DCL-0033-EIDH-E2M0    |                   | 15          | 33A                      | H                        | 4.3                  | 110                | 87  | 120 | 70  | 135 | 6*11   |
| DCL-0040-EIDH-E1M3    |                   | 18.5        | 40A                      | H                        | 4.3                  | 110                | 87  | 120 | 70  | 135 | 6*11   |
| DCL-0050-EIDH-E1M1    |                   | 22          | 50A                      | H                        | 5.5                  | 120                | 95  | 135 | 85  | 145 | 8.4*13 |
| DCL-0065-EIDH-EM80    |                   | 30          | 65A                      | H                        | 7.2                  | 138                | 111 | 150 | 85  | 170 | 8.4*13 |
| DCL-0078-EIDH-EM70    |                   | 37          | 78A                      | H                        | 7.5                  | 138                | 111 | 150 | 85  | 170 | 8.4*13 |
| DCL-0095-EIDH-EM54    |                   | 45          | 95A                      | H                        | 7.8                  | 138                | 111 | 150 | 85  | 170 | 8.4*13 |
| DCL-0115-EIDH-EM45    | 图 B<br>Picture B  | 55          | 115A                     | H                        | 9.2                  | 155                | 125 | 160 | 90  | 195 | 9*18   |
| DCL-0160-UIDH-EM36    |                   | 75          | 160A                     | H                        | 10                   | 165                | 100 | 130 | 98  | 215 | 9*18   |
| DCL-0180-UIDH-EM33    |                   | 90          | 180A                     | F                        | 20                   | 165                | 100 | 130 | 98  | 215 | 9*18   |
| DCL-0250-UIDH-EM26    |                   | 110         | 250A                     | F                        | 23                   | 210                | 176 | 150 | 115 | 255 | 11*18  |
| DCL-0250-UIDH-EM26    |                   | 132         | 250A                     | F                        | 23                   | 210                | 176 | 150 | 115 | 255 | 11*18  |
| DCL-0340-UIDH-EM17    |                   | 160         | 340A                     | F                        | 23                   | 210                | 176 | 150 | 115 | 255 | 11*18  |
| DCL-0460-UIDH-EM09    |                   | 185         | 460A                     | F                        | 28                   | 220                | 191 | 150 | 115 | 280 | 11*18  |
| DCL-0460-UIDH-EM09    |                   | 220         | 460A                     | F                        | 28                   | 220                | 191 | 150 | 115 | 280 | 11*18  |
| DCL-0650-UIDH-E72U    |                   | 300         | 650A                     | F                        | 33                   | 235                | 206 | 160 | 125 | 280 | 11*18  |
| DCL-0650-UIDH-E72U    |                   |             |                          |                          |                      |                    |     |     |     |     |        |

(以上参数仅供参考，选型时请咨询我司业务)

660V输入直流电抗器选型表 660V input DC reactor selection table

| 电抗器型号<br>Reactor Type | 图号<br>Picture NO. | 功率<br>Power (KW) | 额定电流<br>Rated Current(A) | 绝缘等级<br>Insulation Class | 尺寸 Dimension(±5mm) |     |     |     |     |                |                |        |
|-----------------------|-------------------|------------------|--------------------------|--------------------------|--------------------|-----|-----|-----|-----|----------------|----------------|--------|
|                       |                   |                  |                          |                          | D                  | D1  | W   | W1  | H   | H <sub>1</sub> | H <sub>2</sub> | A*B    |
| DCL-0020-EIDA-E5M0    | 图 A<br>Picture A  | 15KW             | 20                       | F/H                      | 107                | 77  | 120 | 82  | 140 |                |                | 8.5*12 |
| DCL-0035-EIDA-E3M1    |                   | 22KW             | 35                       | F/H                      | 126                | 86  | 120 | 87  | 150 |                |                | 8.5*12 |
| DCL-0045-EIDA-E2M2    |                   | 37KW             | 45                       | F/H                      | 122                | 92  | 120 | 92  | 160 |                |                | 8.5*12 |
| DCL-0072-EIDA-E1M4    |                   | 45KW             | 72                       | F/H                      | 152                | 122 | 120 | 97  | 195 |                |                | 8.4*12 |
| DCL-0095-UIDA-E1M0    | 图 C<br>Picture C  | 55               | 95                       | F/H                      | 182                | 90  | 103 | 145 | 215 | 113            | 43             | 12*20  |
| DCL-0120-UIDA-EM85    |                   | 75               | 120                      | F/H                      | 182                | 90  | 110 | 155 | 215 | 113            | 43             | 12*20  |
| DCL-0165-UIDA-EM65    |                   | 90               | 165                      | F/H                      | 212                | 110 | 105 | 140 | 260 | 133            | 56             | 12*20  |
| DCL-0210-UIDA-EM47    |                   | 132              | 210                      | F/H                      | 212                | 110 | 110 | 145 | 260 | 133            | 56             | 12*20  |
| DCL-0264-UIDA-EM38    |                   | 160              | 264                      | F/H                      | 212                | 110 | 118 | 160 | 260 | 133            | 56             | 12*20  |

(以上参数仅供参考，选型时请咨询我司业务)